


Pystymalli

3PU 30-10000 VA

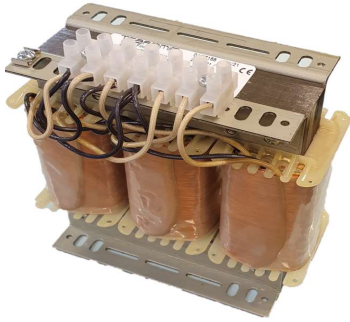

Ominaisuuksia

Jännitteet:	Enintään 1000 V
Teho:	30...10000 VA
Taajuus:	50/60 Hz, muita taajuuksia erikoistilauksesta
Kotelointiluokka:	IP00, IP20
Käyttöympäristön lämpötila-alue:	-30...+40°C
Lämpöluokat:	B (130°C), F (155°C), H (180°C)
Standardit:	IEC 61558-2

S [VA]	Core	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	h [mm]	Ø [mm]	m [kg]
30	3UI 48/17	96	46	50	34	113	90	4,5x8,5	0,9
45	3UI 48/26	96	55	50	43	113	90	4,5x8,6	1,3
63	3UI 60/21	120	54	65	41	134	110	5x10	1,8
100	3UI 60/31	120	64	65	51	134	110	5x10	2,4
200	3UI 75/26	150	67	80	47	154	133	5x10	3,5
350	3UI 75/41	150	82	80	62	154	133	5x10	5,2
450	3UI 90/31	180	76	100	58	173	152	7x13	6,5
750	3UI90/51	180	96	100	78	173	152	7x13	9,0
1000	3UI 114/40	230	88	173	66	230	192	8x16	16,0
1600	3UI 114/64	230	112	173	88	230	192	8x16	20,0
2000	3UI 114/64	230	112	173	88	230	192	8x16	20,5
2500	3UI132/46	265	102	190	74	250	224	8,5x18	22,0
3000	3UI 132/72	265	128	190	100	250	224	8,5x18	31,0
4000	3UI 150/52	300	112	220	82	282	252	8,5x18	31,5
4500	3UI 150/65	300	125	220	95	282	252	8,5x18	36,0
5000	3UI 150/77	300	137	220	107	282	252	8,5x18	42,0
6000	3UI 150/92	300	152	220	122	282	252	8,5x18	49,0
6300	3UI 180/63	360	138	264	108	336	306	11x18	50,0
8000	3UI 180/63	360	138	264	108	336	306	11x18	50,0
9000	3UI 180/78	360	153	264	113	336	306	11x18	60,0
10000	3UI 180/92	360	167	264	127	336	306	11x18	70,0

