


Pystymalli

3PU 6,3-100 kVA

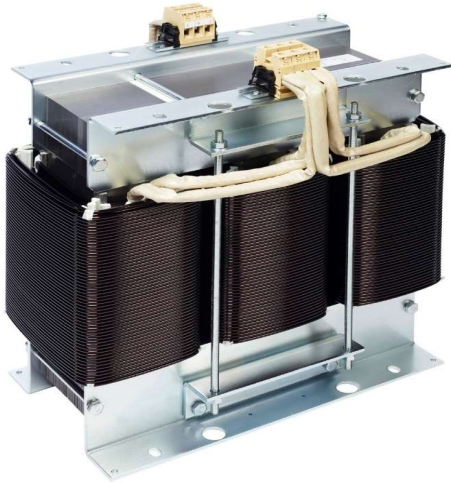

Ominaisuuksia

Jännitteet:	Enintään 1000 V
Teho:	6,3...100 kVA
Taajuus:	50/60 Hz, muita taajuuksia erikoistilauksesta
Kotelointiluokka:	IP00, IP20
Käyttöympäristön lämpötila-alue:	-30...+40°C
Standardit:	IEC 61558-2

S [kVA]	Core	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	h [mm]	Ø [mm]	m [kg]
6,3	3UI 180/63	365	175	264	145	396	346	10x18	48
8,0	3UI 180/78	365	190	264	160	396	346	10x18	60
10,0	3UI 180/78	365	190	264	160	396	346	10x18	65
12,5	3UI 210/73	425	183	316	153	432	372	12x18	78
16,0	3UI 210/73	425	183	316	153	432	372	12x18	93
20,0	3UI 210/103	425	213	316	183	432	372	12x18	105
25,0	3UI 240/83	490	193	356	157	487	427	12x18	126
31,5	3UI 240/110	490	220	356	184	487	427	12x18	146
40,0	3UI 270/120	550	250	350	210	547	487	12x18	180
50,0	3UI 270/150	550	280	350	240	547	487	12x18	210
63,0	3UI 370/140	610	300	350	240	670	610	13x20	250
80,0	3UI 370/140	610	300	350	240	670	610	13x20	300
100,0	3UI 370/180	610	300	350	280	670	610	13x30	370

